



Eforte Window Profile System

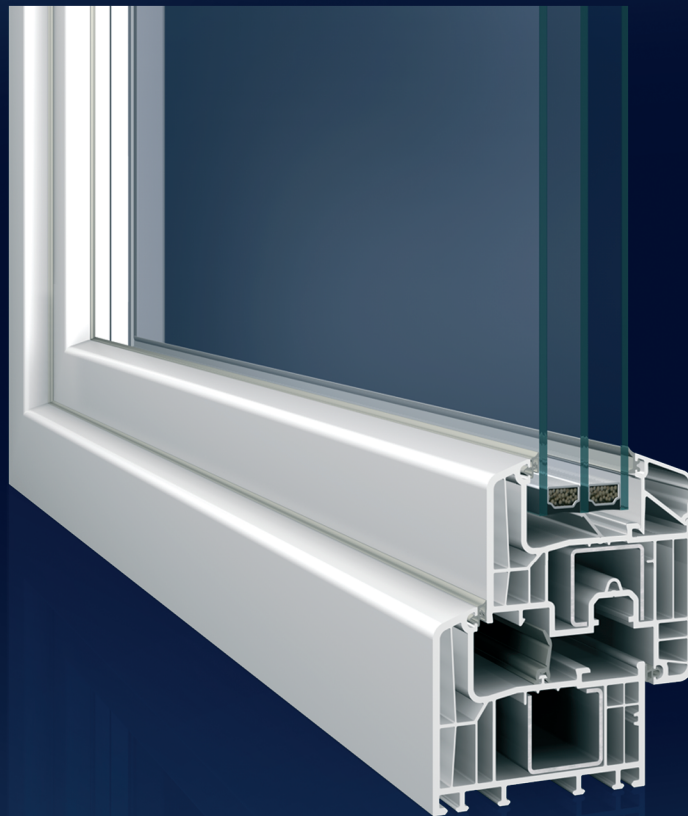


Eforte sets new standards for energy efficient window profiles: with a conventional steel reinforcement, a profile depth of 84 mm and without additional insulating elements this profile accomplishes an excellent U_f -value. Offering a flexible installation for profile complies with all types of building requirements from the passive house standard up to overlap bonding, and is also available in many attractive colours.

Eforte

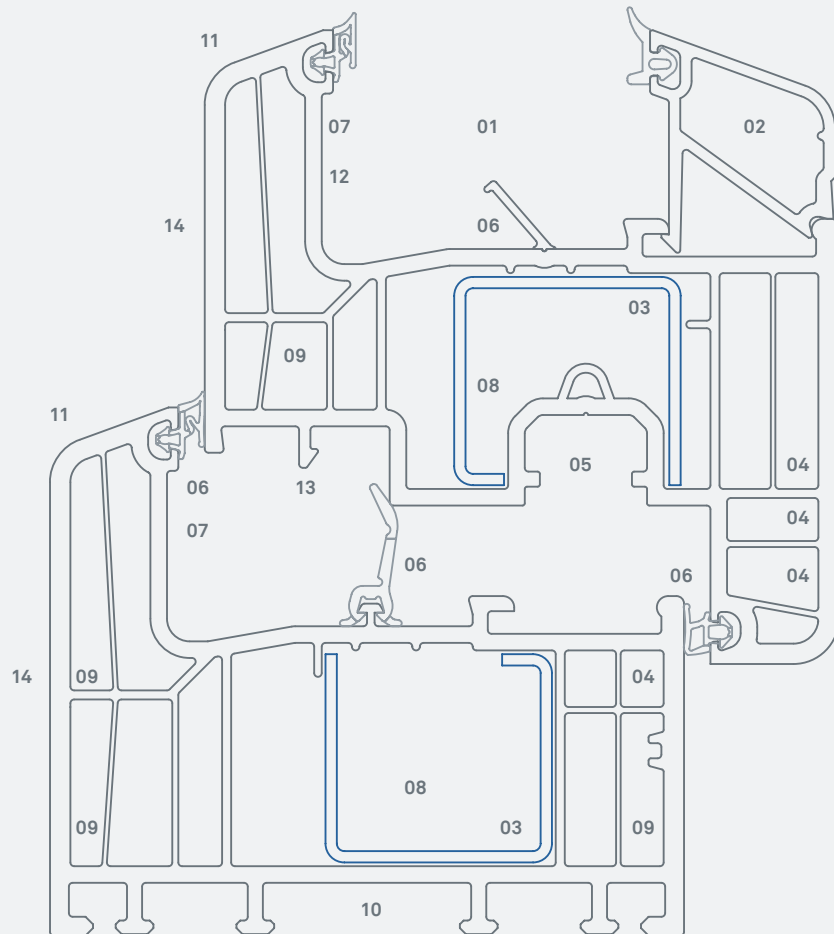

Eforte
Fig.: 1:1

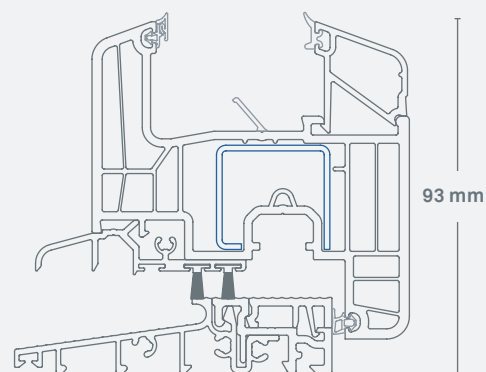

Barrier-free balcony door threshold
Fig.: 1:2



INOUTIC IC PLUS
Comfort / Safety



INOUTIC ECO PLUS
Energy Saving / Quality



INOUTIC DESIGN PLUS
Colour / Style

- 01 20 to 56 mm glazing:** for very thick thermal insulation or soundproof glazing
- 02 2-foot glazing bead in compliance with DIN 18545:** for enhanced burglary protection
- 03 Strong reinforcements:** stable window design / large chambers for additional insulation options.
- 04 Fittings:** high level of functionality and long service life / mounting through three walls and an additional screw port
- 05 Euro-groove, 13 mm centerline distance:** allows retrofitting to safety windows with high burglary protection

- 06 New additional seal in glazing rebate and three framed seals:** maximum thermal insulation / wind resistance and watertightness
- 07 Glazing rebate height 25 mm:** best thermal insulation / avoids condensation
- 08 6-chamber technology:** excellent thermal insulation with steel / U_i -value $0.95 \text{ W/m}^2\text{K}$
- 09 Dowel, draining and ventilation holes through pre-chambers:** moisture and corrosion protection in the steel and reinforcement chambers
- 10 Profile depth 84 mm:** high thermal insulation saves heating costs

- 11 Slender profile with narrow cross-section of 120 mm and 20 degree bevels:** good water run-off / well-balanced design
- 12 Overlap bonding:** floor to ceiling elements of up to 2.60 m are possible / enhanced distortion resistance
- 13 Weather groove:** integrated mounting for false mullion profile
- 14 Design options:** large selection of decors and colours / available in plain colour and wood decors, with pearl-like structure and in metallic look / also optionally with aluminium cladding

INOUTIC PROFILES COMPLY WITH ALL QUALITY AND TESTING STANDARDS. INOUTIC IS A FOUNDER MEMBER OF THE INITIATIVE "PLASTIC WINDOW RECYCLING" REPRESENTING THE LEADING GERMAN PLASTIC PROFILE MANUFACTURERS UNDER THE NAME REWINDO GMBH.

YOUR WINDOW SPECIALIST